

Applications

Glass Reinforced Polyester (GRP) profile dedicated to concrete ground ducts


- avoid railtrack ballast falling into electrical concrete ducts when lifting the lids
- insures perfect positioning of ground ducts covers
- installation and revamping with minimum investment
- easy handling and installation (2, 3 et 4 meters length)
- 0% halogens GRP with unmatched life span

Standard GRP mix


Resin technical specifications can be supplied on request
R6204

Standard colour

Light gray colour RAL 7032

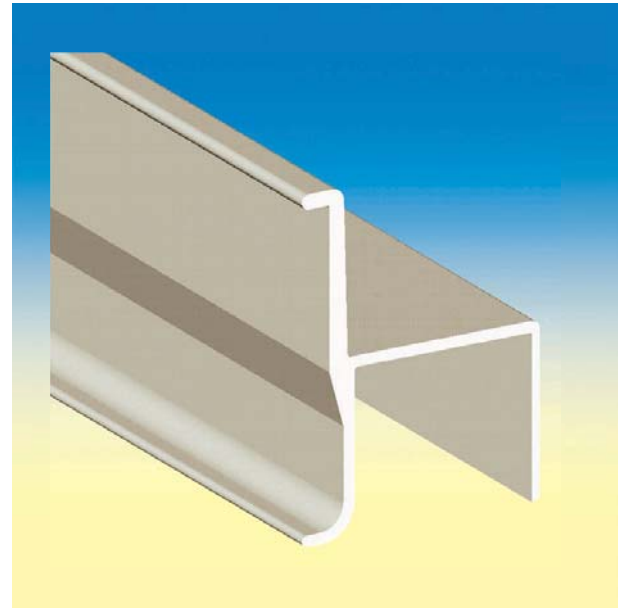


Installation

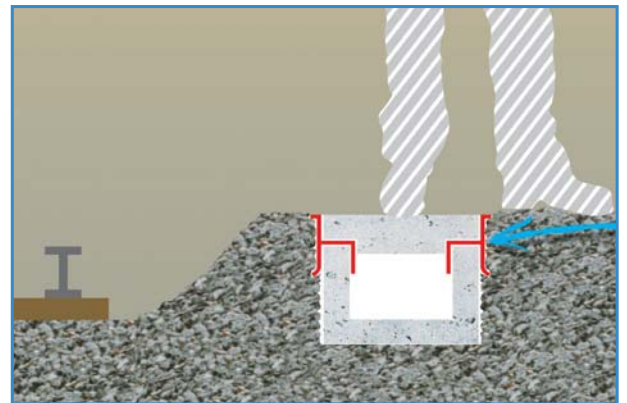

Dimensions :

- PR 3635 w = 36 / h = 35 mm
- PR 5045 w = 50 / h = 45 mm
- PR 5555 w = 55 / h = 55 mm



Other dimensions on request